

Plug-in Wireless Signal Repeater


SR1000

User Manual

Introduction

The repeater is a wireless signal relay transmission device. With MCU technology, it can decode the signal in the air and strengthen the transmitting power to extend the transmission distance range. Failure to receive signal to panel from wireless accessories is frequently happened due to the long distance range when the remote controlling or wireless alarm systems are applied to large scale of commercial tall buildings, villa, and industrial areas. This wireless signal repeater could solve this problem and further distance range signal transmitting could be achieved.

Product Overview

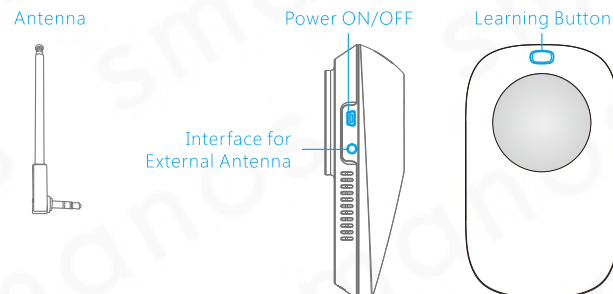

Note: Please pull out the antenna for optimal performance.

LED Indication

Green LED on: working status
Blue LED flashes once: signal transmitting

Green and blue LEDs flash alternatively: in connect status

Adding and Deleting Accessories


When adding or deleting accessories, you should make this repeater in learning or deleting accessories status. Firstly, turn the switch from OFF to ON (If the repeater is in ON status, switch it to OFF first and then switch it to ON), the repeater will enter learning or deleting accessories status for one minute while the green and blue light flash in turn.

Extend Transmission Distance Between Accessories And Control Panel

When the repeater is in connect status, press its connect button, then trigger a wireless sensors (For example, press any button on the remote control or separate the transmitter and magnet of the door/window contact). The blue LED lights up for 2 seconds and goes off, then the green and blue LEDs flash alternatively. If the repeater is still in connect status, you can repeat the above operation to add more accessories.

Note: If the repeater exits the connect status, switch off and then switch on the repeater to re-enter the connect status. Then repeat the above operation to add more accessories.


Workflow:

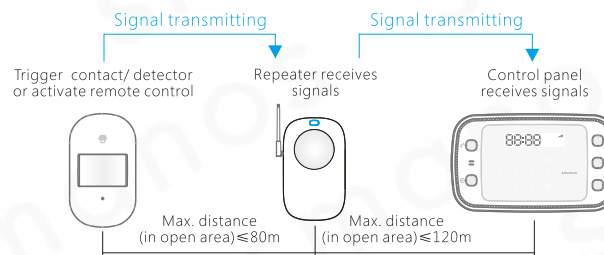

Extend Transmission Distance Between Control Panel and Siren

Press the connect button under connect status. Press the SOS or arm button on the control panel, the repeater succeeds in connecting with the control panel after the blue LED lights up for 2 seconds and goes off. Then the green and blue LEDs flash alternatively.

Workflow:

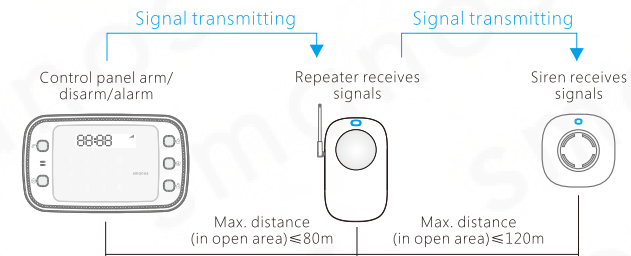

Deleting Accessories

Press and hold the connect button for 5 seconds under connect status, the repeater disconnects from all accessories after the blue LED lights up for 2 seconds and goes off. Then the green LED keeps on.

Specifications

Power Supply: AC 110V-240V, 50/60Hz

Wireless Transmitting Range: < 120m

Wireless Receiving Range: < 80m

Radio Frequency: 868MHz or 915MHz (±75KHz)

Static Current: < 15.5mA

Transmitting Current: < 1.1A

Maximum Accessories Supportable: 40 PCS

Back-up Battery: 3.7V 600mAh Lithium Battery, 2.22Wh

Housing Material: ABS plastic

Operating Condition:

Temperature: -10°C ~ +55°C

Relative Humidity: < 80% (non-condensing)

Dimension(L x W x H): 140 x 86 x 87mm

CHUANGO®			
产品型号	SR1000	部件名称	说明书
设 计	林寿	材 料	80克书写纸
印刷尺寸	285X210mm	成品尺寸	95X70mm
工 艺	折页	版 本	SR1000-UM-EN-V1.0
注: 双色、单面印刷			