



Introduction

RE2300 remote control is dainty and delicate, easy to carry. It can be attached to your key rings, or just put into your pockets or purses. When you are about to exit or entry the house, you can use it to arm or disarm the system, In case of emergency, press the [SOS] button, the alarm will be activated immediately.

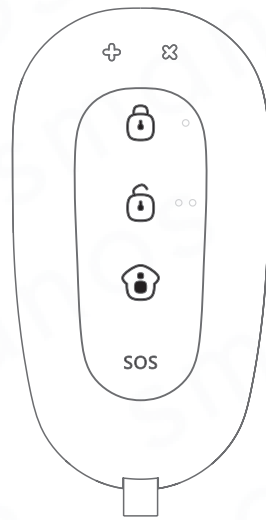

Overview

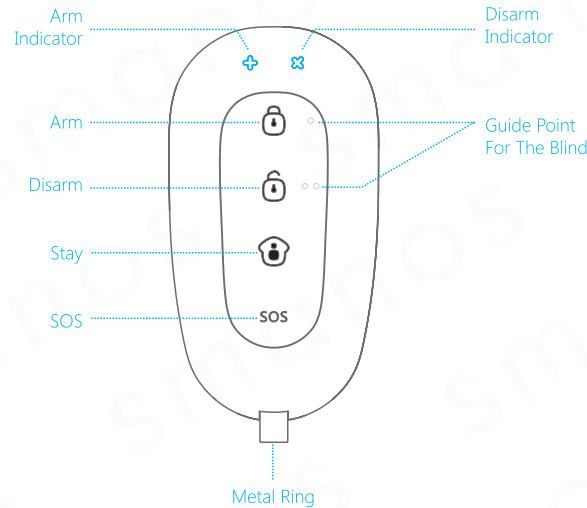

LED Indication

- + LED flashes once: Armed or in home mode
- × LED flashes once: Disarmed
- +, × LEDs flashes once: SOS

Connect Remote Control

Connecting the remote control is to build a wireless connection between the remote control and the control panel.

1. Control panel enters into the connecting state (For details, please refer to the relative user manual).
2. Press any key on the remote control, and the control panel beeps once, indicating a successful connection.

Note: If the control panel beeps twice when the above operation is done, it means the remote control has been connected before.

Operating Instructions

Icon	Operation	Meaning
	Arm	Press this button, and the control panel beeps once, indicating the whole system is armed.
	Disarm	Press this button, and the control panel beeps twice, then the system is disarmed except those sensors in the 24-hour zone.
	Stay	Press this button, all the sensors in home mode will enter disarm status. While other sensors remain in arm status, then user can move freely in the home zone.
	SOS	Press this button, the system will enter into the alarm state immediately.
	Mute Arm	Press the [Stay] button for 1 second, wait until its indicator flashes once then press the [Arm] button within 3 seconds, the system is armed silently.
	Mute Disarm	Press the [Stay] button for 1 second, wait until its indicator flashes once then press the [Disarm] button within 3 seconds, the system is disarmed silently.

Specifications

- Power Supply:** DC 3 V (CR2032 lithium button cell battery x 1)
- Transmit Current:** <9.5 mA
- Transmitting Distance:** <80 m (Open area/no interference)
- Radio Frequency:** 868 MHz or 915 MHz
- Housing Material:** PC+ABS plastic
- Operation Condition:**
 - Temperature: -10 °C ~ +55 °C
 - Relative Humidity: <80% (non-condensing)
- Dimensions:** 71 × 38 × 12 mm